

DEW POINT SENSOR (-20°C ... +50°C) S 215



COMPACT DESIGN

Makes it easy to fit into the application



Ensure your dry air — monitor the dew point



S 215 FEATURES



**COMPACT
DESIGN**
Makes it easy
to fit into the
application



**PRECISE
MEASUREMENT**
Long term stable
results



**DEW
POINT**
Measures
down
to -20°C






**ANALOG
OUTPUT**
4...20 mA
loop powered

The SUTO dew point sensor S 215 provides reliable and long term stable dew point monitoring in industrial applications. With this model dew point measurement in refrigerant dryers becomes affordable and can replace traditional temperature measurement which often couldn't tell the real dew point.

S 215 outputs the measurement value through the loop powered 4-20 mA signal.

S 215 DIMENSIONS

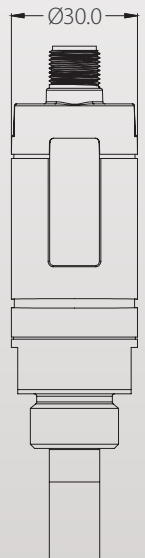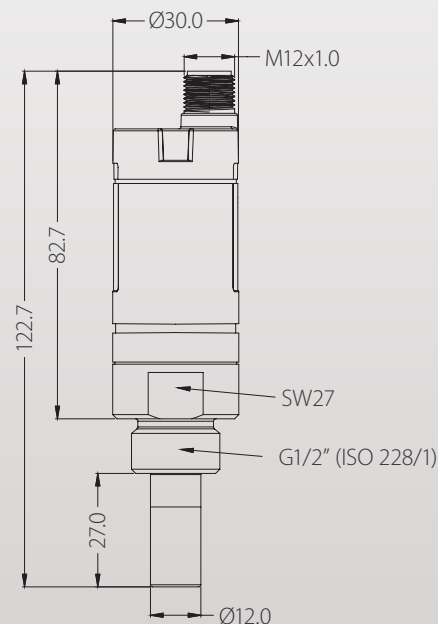

S 215 BENEFITS

- Affordable dew point sensor for mid range applications such as refrigerant dryer monitoring
- Long term stability
- IP65 casing provides robust protection in rough industrial environment
- Fast response time ensures safe and reliable indication whenever dew points are out of valid ranges
- Can be installed directly into dryers through G 1/2" thread
- High accuracy of $\pm 2^{\circ}\text{C}$ dew point

S 215 TECHNICAL DATA

General Specifications	
Measuring range	Dew point Temperature -20°C ... +50°C -30°C ... +70°C
Dew point sensor	Polymer
Temperature sensor	NTC
Pressure sensor	N/A
Accuracy	Dew point Temperature ±2°C 0.3°C
Operating Pressure	-0.1 ... 5.0 MPa
Operating Temperature (Medium)	-30°C ... +70°C
Measured gases (Medium)	Non-corrosive gases
Response Time t90 (@ 4 l/min)	-20°C -> +20°C: 20 sec +10°C -> -20°C: 60 sec
Ambient Temperature	-20°C ... +50°C
Ambient Humidity	0 ... 100 %rH
Supply Voltage	12 ... 30 VDC
Current consumption	20 mA @ 24 VDC
Output signals	4 ... 20 mA 2-Wire
Electrical connection	M12, 5 poles
Process connection	G 1/2" thread (ISO 228/1) Stainless steel 1.4301 (SUS 304)
Casing material	Zinc alloy
Classification	IP65
EMC	IEC 61326-1
Approval	-
Sensor protection	Sinter filter
Transport Temperature	-30°C ... +70°C
Storage Temperature	-20°C ... +50°C
Weight	195 g



Dew point sensor ideal for refrigerant dryers. Loop powered 4 ... 20 mA output.

S 215 ORDERING

Please use the following table to assist in placing your order with our sales staff.



Visit our website or e-mail us:
www.suto-itec.com
sales@suto-itec.com

S 215 DEW POINT SENSOR (-20°C ... +50°C)	
Order No.	Description
S699 0415	S 215, dew point sensor including M12 connector (straight type), -20°C ... +50°C, G 1/2" thread
A699 4003	High pressure option 35 MPa (350 bar)