

# Solenoid Valve - 5/2 - Single Solenoid - Monostable

## Benefits & Features


- Five way single solenoid valve
- Suitable for gaseous media
- High dependency applications
- Compact design
- Brass body 3/8" and 1/2"
- 316 stainless steel body 1/2" only
- Ex-d IIC -60°C to +60°C ambient versions
- ATEX, EAC Ex (CU TR 012) and IECEx, Ex-d approved



## Specification

<b>Configuration</b>	Internal pilot operation
<b>Port Sizes</b>	3/8" & 1/2" BSP or NPT
<b>Orifice</b>	11.0mm
<b>Kv</b>	see table below
<b>Body</b>	Brass or 316 stainless steel
<b>Media</b>	gaseous media, subject to material compatibility
<b>Pressure ranges</b>	3 - 10 Bar
<b>Seals</b>	NBR, VITON, HNBR

## Configuration




D13.d Single Solenoid Monostable	
IN:	E
Coil De-energised:	From E to U1
	From U2 to S2
Coil Energised:	From E to U2
	From U1 to S1

## Technical Data

Model	Orifice	Body Rating	Port Size BSP or NPT	Min. /Max. Operating Differential Pressures.				KV Flow Factor L/min.
				Min. BAR	Maximum BAR			
					AC	DC		
D13	11	10	3/8" or 1/2"	3	10	10	30	

# Solenoid Valve - 5/2 - Single Solenoid - Monostable

## Weights & Dimensions

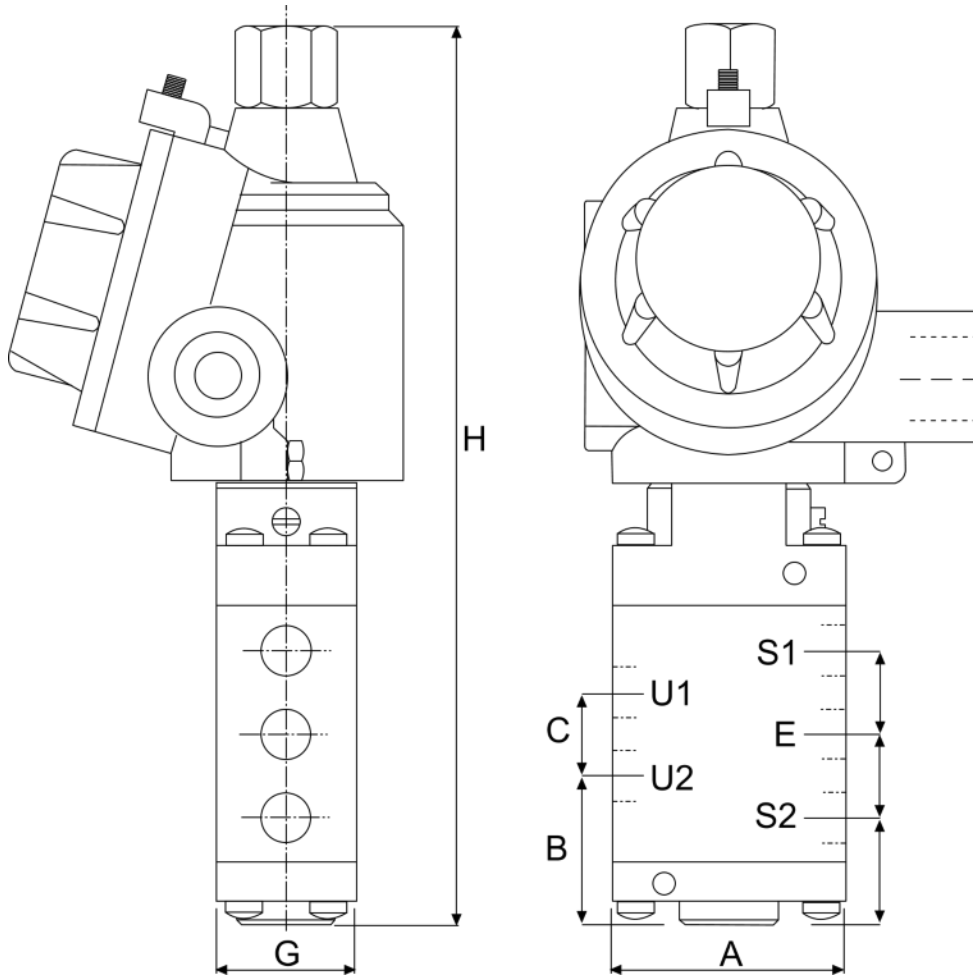

Weight Kg	Dimensions mm							
	A	B	C	D	E	F	G	H
1.2	60	41	30	30	30	26	30	223

## Order Codes


A	Body	B	Port	C	Seals (fluid temp. min / max)	D	Protection	E	Options		
T	Brass	E	3/8" BSP	T	3/8" NPT	0	NBR (-10°C to + 70°C)	B	II 1/2 GD Ex-d IIB T6 (-20 to +40°C)	X	Manual Override
I	316 Stainless Steel	F	1/2" BSP	G	1/2" NPT	1	VITON (-10°C to + 90°C)	C	II 1/2 GD Ex-d IIC T6 (-20 to +40°C)	/SG	Degreased for oxygen
	* 1/2" body only					7	HNBR (-10°C to + 90°C)	/LT	II 1/2 GD Ex-d IIC T6 (-60 to +60°C)		
								H	Ex-d c IIB IP67 IECEX		
								T	Ex-d c IIC IP67 IECEX		
								R	Ex-d IIC EAC Ex		
								S	IP67 (Safe Area)		

# Electrical Wiring - IP67 Housing


## Installation Procedures & Methods




**Attention: For safety purposes, always ensure that the power supply is disconnected. After de-energising, allow 15 minutes before continuing the following procedures**




**A**

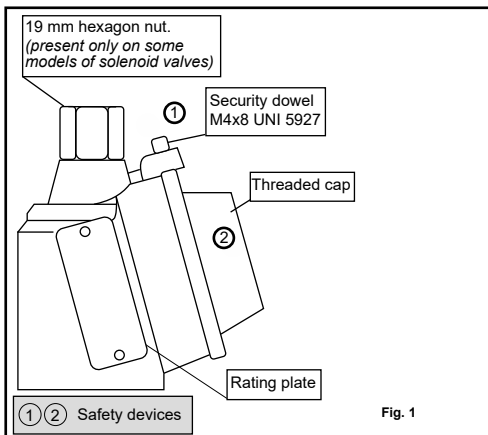

**B**

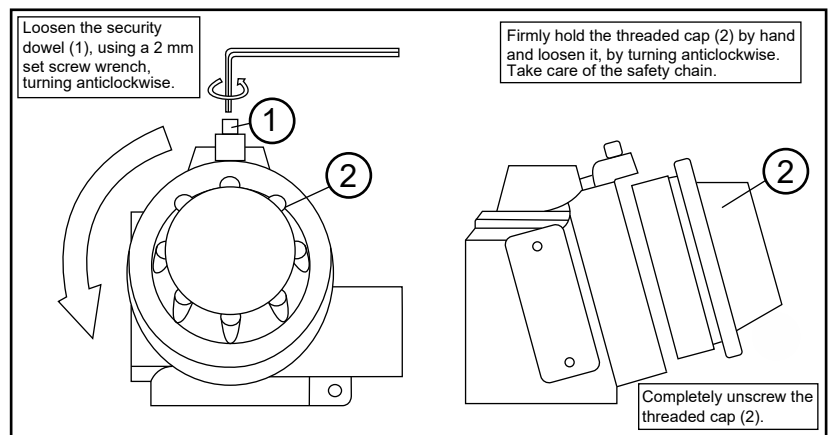


**C**

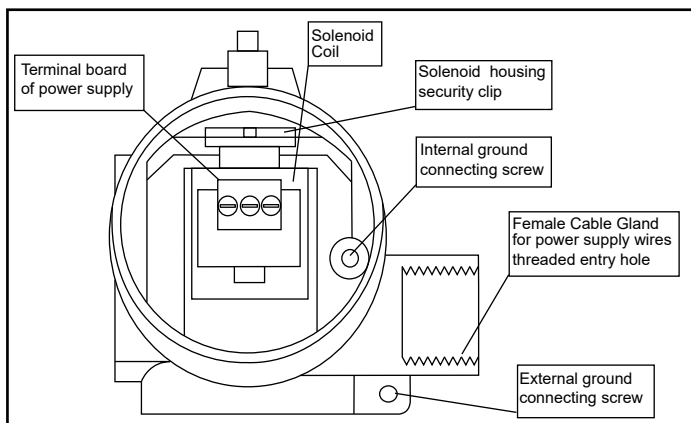


Pipe fittings used for cable entry (Cable, duct, conduit etc) are NOT supplied by the manufacturer. Installation engineers should ensure that the use of fittings are of the correct diameter and suitable to secure the tightness of the cable used. Where site conditions indicate, cable duct, conduit etc. must be ATEX approved, for a protection degree equal or greater than the protection degree indicated on the rating plate. The female thread type is indicated on the housing: M20\*1.5mm or 1/2"NPT

**D**

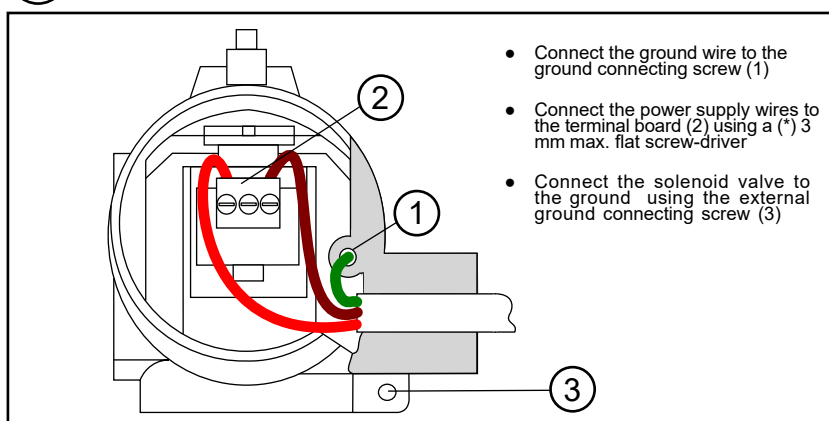

Electrical Cable Gland Entry Thread Marking

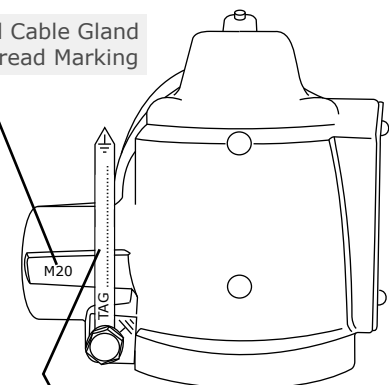

Earth Tag. Can be customised with Tag number, part number etc.